


Power & data cable Type 2009CC

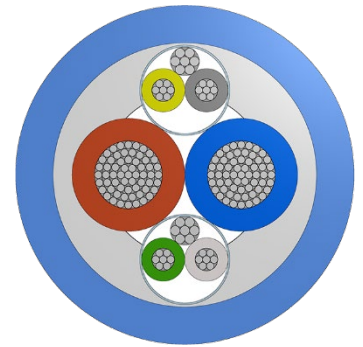

Construction characteristics

2 x Screened twisted pairs	0.22 mm ² (7/0.20 mm) Tinned Copper Polyolefin insulated to 1.15 mm 2 off twisted with Tinned Copper drain wire in interstice Overall helical 12/23µm Al/PET foil screen, minimum overlap 50% OD: 2.5 mm Colour: YW/GY GN/WH
2 x Conductors	2.00 mm ² (63/0.20 mm) Tinned Copper HDPE insulated, 0.80 mm nom RTI OD: 3.0 mm Colour: BN BU
Lay up	Conductors and twisted pairs twisted together with fillers in interstices OD: 6.00 mm
Bedding	PVC 0.50 mm nom RTI OD: 7.00 mm Colour: WH
Jacket	Polyether Polyurethane 85 Shore A Halogen Free 1.00 mm RTI OD: 9.00 mm +/- 0.30 Colour: BU

Mechanical characteristics

Max. operating temp	
Static	+70°C
Dynamic	+60°C
Cold flex temp	0°C
Depth rating	3,000 m
Min. recommended bend radius	
Static	70 mm
Dynamic	120 mm
Nominal weight	
In air	101 kg/km
In seawater	36 kg/km at SG 1.025

Electrical characteristics

0.22 mm² conductors

Max. conductor resistance 101.40 Ω/km at 20°C

Max. recommended voltage 24 V

Calculated characteristic impedance 88 Ω

Calculated capacitance 75 pF/m

2.00 mm² conductors

Max. conductor resistance 10.50 Ω/KM at 20°C

Max. recommended voltage 600 V

Max. recommended current/conductor 16 A

Min. insulation resistance

Core - Core > 500 MΩ/km at 250V

Core - Screen > 250 MΩ/km at 250V

In compliance with CE, UK CA, UK NI, RoHS, LVD