


# Power & data cable Type 2009CC

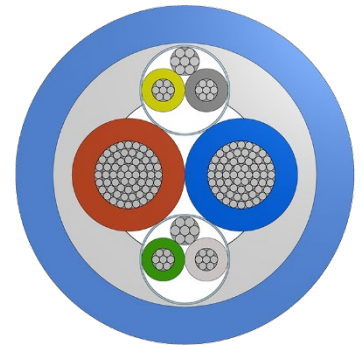

## Construction characteristics

<b>2 x Screened twisted pairs</b>	0.22 mm <sup>2</sup> (7/0.20 mm) Tinned Copper Polyolefin insulated to 1.15 mm 2 off twisted with Tinned Copper drain wire in interstice Overall helical 12/23µm Al/PET foil screen, minimum overlap 50% OD: 2.5 mm Colour: YW/GY GN/WH
<b>2 x Conductors</b>	2.00 mm <sup>2</sup> (63/0.20 mm) Tinned Copper HDPE insulated, 0.80 mm nom RTI OD: 3.0 mm Colour: BN BU
<b>Lay up</b>	Conductors and twisted pairs twisted together with fillers in interstices OD: 6.00 mm
<b>Bedding</b>	PVC 0.50 mm nom RTI OD: 7.00 mm Colour: WH
<b>Jacket</b>	Polyether Polyurethane 85 Shore A Halogen Free 1.00 mm RTI OD: 9.00 mm +/- 0.30 Colour: BU

## Mechanical characteristics

<b>Max. operating temp</b>	
Static	+70°C
Dynamic	+60°C
<b>Cold flex temp</b>	0°C
<b>Depth rating</b>	3,000 m
<b>Min. recommended bend radius</b>	
Static	70 mm
Dynamic	120 mm
<b>Nominal weight</b>	
In air	101 kg/km
In seawater	36 kg/km at SG 1.025

## Electrical characteristics

---

### 0.22 mm<sup>2</sup> conductors

Max. conductor resistance 101.40  $\Omega$ /km at 20°C

Max. recommended voltage 24 V

Calculated characteristic impedance 88  $\Omega$

Calculated capacitance 75 pF/m

### 2.00 mm<sup>2</sup> conductors

Max. conductor resistance 10.50  $\Omega$ /KM at 20°C

Max. recommended voltage 600 V

Max. recommended current/conductor 16 A

### Min. insulation resistance

Core - Core > 500 M $\Omega$ /km at 250V

Core - Screen > 250 M $\Omega$ /km at 250V

### In compliance with

CE, UK CA, UK NI, RoHS, LVD

PFAS-free