


Subconn PUR Cable

Type PCX50

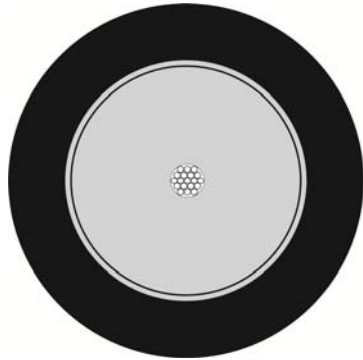

Document no.	2014036SC
Revision	B
Date	05.01.2021
Prepared by	LMR
Approved by	SB

Construction Characteristics

Conductors	AWG 20/19X32 Silver plated copper, RG-400 (1 off)
Insulation	FEP Insulation 0,966 mm
Screen	AWG 38 double braid silver plated copper
Inner jacket	E-CTFE Jacket. Color natural 0,38 mm
Outer jacket	Polyurethane jacket. Color black. Nominal thickness approx. 1,27 mm Marking: Subconn 50 ohm COAX

Mechanical Characteristics

Diameter	Nom. 7,38 mm
Operating Temperature	-40°C to +150°C
Bend radius	10X O.D.

Electrical Characteristics

Impedance	50 Ω
Capacitance	29,4 pf/ft nominal
Operating Voltage	300 V