


Subconn PUR Cable

Type PSCX6C20# 50Ω

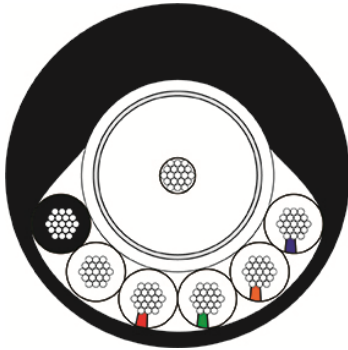

Document no.	2013006SC
Revision	B
Date	05.01.2021
Prepared by	LMR
Approved by	SB

Construction Characteristics

Conductors	0,50mm ² (#20AWG)stranded silver plated copper wire, Insulated with FEP(6 off)
Coax	50Ω Coax RG400, with a diameter of 4,95 mm
Binder	An overall Clear Mylar.
Outer jacket	Polyurethane jacket. Colour black, Nominal thickness approx. 1,52 mm ²

Mechanical Characteristics

Diameter	Nom. 9,80 mm
-----------------	--------------

Electrical Characteristics

Capitance	32,0 pF/ft
Max Attenuation	4,50 db @ 100 mhz 10,5 db @ 400 mhz 17,0 db @ 1000 mhz
Impedence	50 Ω